



PROCUREMENT SERVICES FROM
BDFS
BuyDirectFromSuppliers.com
Manufactured in Mexico-China-Brazil-USA-Bahrain
Brent Gilbertson Managing Partner/Founder Mobile: 678-361-5559
Brent@BuyDirectFromSuppliers.com

Industrial Adhesive Tape Specialists



PROCUREMENT SERVICES FROM
BDFS
BuyDirectFromSuppliers.com
Manufactured in Mexico-China-Brazil-USA-Bahrain
Brent Gilbertson Managing Partner/Founder Mobile: 678-361-5559
Brent@BuyDirectFromSuppliers.com



➤ 20+ Years/Experience of
OEM&ODM. ➤➤➤

High Temperature Resistance Tape

Polyimide Tape/Kapton Tape

Code :100110

Base material: Polyimide film

Adhesive: silicone glue

Thickness: 50U 55U 60U 80U 100U

Temperature: 260°C/60 mins

Application: Mainly used for coating paint electroplating shielding protection, high temperature resistance, acid and alkali resistance, no residual adhesive.



Polyester Silicone Tape

Code: 100120


Base material: Polyimide film

Adhesive: silicone glue

Thickness: 50U 55U 60U 80U 100U to 250U

Temperature: 220°C/30mins

Application: Mainly used for coating paint electroplating shielding protection, high temperature resistance, acid and alkali resistance, no residual adhesive.

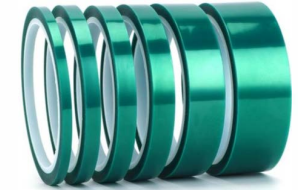

Use Effect Display



scope of application



High temperature protection



PCB protection



Paint screen



Anodizing of aluminium

High Temperature Resistance Tape

Plasma Thermal Spraying Cover Tape

Code: 100130

Base material: High quality glass fiber cloth

Adhesive: silicone glue

Thickness: 170U 190U 280U 300U

Temperature: 800°C/60 mins

Application: Mainly used in plasma spray masking protection, supersonic shielding protection and flame spray shielding protection, arc spraying work covered protection, semiconductor melt cover protection, airlines maintenance center, air force base, textile machinery parts manufacturing, printing machinery manufacturing.



Mylar Tape

Code: 100140

Base material: Polyester film

Adhesive: Acrylic glue


Thickness: Accept custom

Temperature: 130°C


Application: It is used for insulation wrapping of various kinds of motors and electronic components such as transformers, motors, capacitors and high voltage isolation between main board circuit and housing of switching power supply.



The Explosion Spraying



Supersonic Flame Spraying

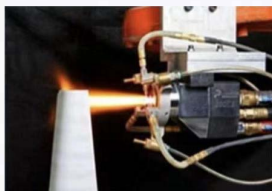


Plasma Spraying




Cold Spraying




The Arc Spraying




Hot Spraying



Transformer




electronic component




Motor



Capacitor



Power switch board



Circuit board

High Temperature Resistance Tape

Fiberglass Cloth Tape

Code: 100150

Glass cloth tape is a white glass cloth tape with a high-temperature thermosetting silicone pressure-sensitive adhesive. It is designed for use in 600-volt dry location applications motors, and transformers with and without varnish coating.

Feature:

- H-class high temperature resistant 468°F (260°C)
- Nice dielectric strength
- Insulation and solvent-resistant
- Silicone adhesive removes cleanly with no glue residue.
- Abrasion resistance and good mechanical strength



Fiber Glass Thermal Conductive Tape

Code: 100160


Adhesive : Acrylic

Size:100u/300u* 20mm*30m or customized
 Temperature resistance: 25°C - 160°C

Application: Used for attaching heatsinks to CPU GPU, high power LED, Video Card RAM, DDR. Memory Modules and other power Semiconductors



battery protect

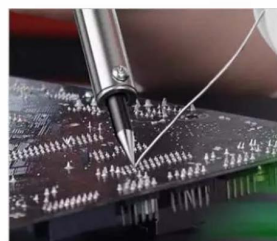


Electroplating welding



electric motor



Electronic component

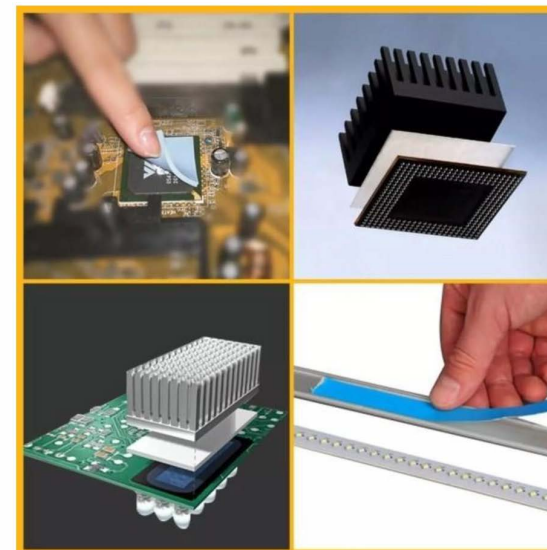

Cloth Tape

Single Sided Cloth Carpet Tape

Code : 101110
Adhesive : Natural rubber/Hotmelt
Size: 1020mmx500m (Jumbo size) 50mmx50m or customized (Roll size)

Application :
 carpet seams merger, heavy packaging, sealing, repairing, binding books, marked with color points, waterproof packing, cooling pipe, surface protection, etc.



Double Sided Cloth Carpet Tape

Code: 101120
Adhesive : Natural rubber/Hotmelt
Size: 1020mmx500m (Jumbo size) 50mmx50m or customized (Roll size)

Application:
 Carpet hold-down specially designed for convention&exhibitions General purpose uses in manufactureand construction Multi-purpose uses for general mounting and holding.




Cloth Tape

Cloth Duct Tape

Code :101130
Adhesive: /Natural rubber/Hotmelt
Size :1020mmx500m (Jumbo size)
 50mmx50m or customized
 (Roll size)

Application:
 Industrial ducts sealing or jointing .
 automotive edge protection
 during abrasive
 processes – whether hand sanding, machine sanding or
 sand blasting.

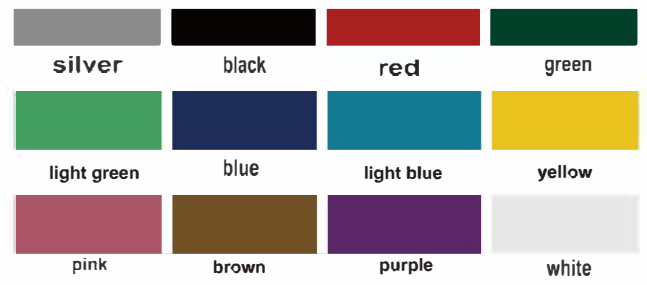

Fluorescent Neon Spike Tape

Code : 101140
Feature & Benefits
 High performance adhesive system.
 Highly conformable to irregular surfaces
 and shapes.
 Weather resistant and abrasion resistant.
 Hand Tearable.



Applications
 Protecting and anchoring wiring in
 photography and film.
 Bookbinding.
 Marking and labeling equipment cases
 and boxes.



Cloth Tape

Matte Gaffer Cloth Tape

Code : 101150

Adhesive : Natural rubber/Hotmelt

Size: 1020mmx500m (Jumbo size) 50mmx50m or customized (Roll size)

Application:

Used for holding wiring, lighting, stage props and color code, for A/V, TV, photography, theatres(no light reflection), motion picture industry, bookbinding.



Camouflage Cloth Tape (Bionic Tape)

Code : 101160

Adhesive : Natural rubber/Hotmelt

Size: 1060mmx1000m (Jumbo size) 50mmx50m or customized (Roll size)

Application:Used for armies, hunters, photographers and others to work outdoors.



Aluminum Foil Tape RoHS, REACH

Aluminum Tape With Liner UL181A,UL723

Code : 201110

Adhesive : Solvent /Water base

Size: 1020mm(1040mm,1200mm,1232mm)x1000m (Jumbo size)
50mmx50m or customized (Cut rollsize)

RoHS, REACH Standard

Application :

Used for the seam bonding of all aluminum foil composite materials, the sealing of the puncture points of the thermal insulation and the repairing of the damaged parts;

The thermal insulation and water vapor sealing of various thermal insulation cotton boards, pipes and air ducts;

Pasting and fixing of metal pipes of household appliances such as refrigerators and freezers.



Aluminum Tape Without Liner

Code : 201120

Adhesive : Solvent

Size :1020mm(1040mm,1200mm,1232mm)x1000m (Jumbo size)
50mmx50m or customized (Roll size)

Application:

It is suitable for fixing the radiating fins in refrigerators and freezers, eliminating and shielding the electromagnetic interference of electronic products.



Aluminum Foil Tape RoHS, REACH

HVAC Low Temperature Aluminum Foil Tape

Code : 201130

Adhesive : Solvent

Temperature:-40 to 120°C

Size :1020mm(1040mm,1200mm,1232mm)x1000m (Jumbo size)
50mmx50m or customized (Roll size)

Application:

Thermal conductivity-holding copper cooling tubes to refrigerator panels to help maximize cooling efficiency.



Reinforced Aluminum Foil Tape ULC-S102


Code : 201140

Adhesive : Emulsion base/Synthetic rubber

Size :1020mm(1040mm,1200mm,1232mm)x1000m (Jumbo size)
50mmx50m or customized (Roll size)

Application:

Used as heat insulation and water vapor barrier layer for steel structure buildings or central air-conditioning ducts, and also as sound absorption and heat insulation materials for high-rise buildings, theaters, concert halls, etc.

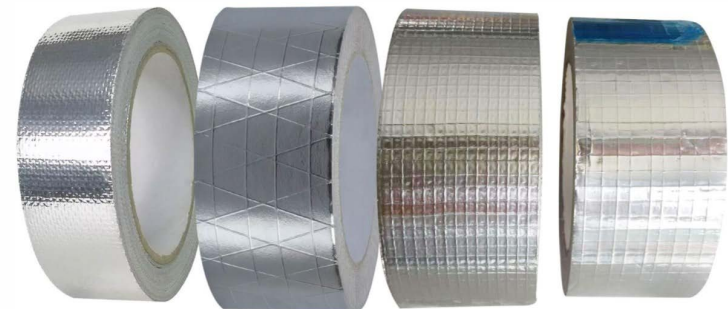

Aluminum Foil Tape

RoHS, REACH

Fiberglass Cloth Composite Aluminum Foil Tape

Code : 201150

Adhesive : Solvent/Synthetic rubber

Size : 1020mm(1040mm,1200mm,1232mm)x1000m (Jumbo size) 50mmx50m or customized (Roll size)

Application:

Used for the splicing of pipe seals, heat insulation and water vapor barrier of HVAC ducts, heating and cooling water pipes, especially for pipe sealing in the shipbuilding industry.



Woven Fabric Mesh Composite Aluminum Foil Tape

Code : 201160

Adhesive : Solvent/Synthetic rubber

Size : 1020mm(1040mm,1200mm,1232mm)x1000m (Jumbo size) 50mmx50m or customized (Roll size)

Application:

Used for the higher bonding strength requirements or the interface and seam fit with the veneer material of the water vapor barrier layer.



PVC Tape CE, UL, ROHS

PVC Electrical Insulation Tape

Code : 401110

Adhesive: Natural rubber

Size: 130u/150u* 1250mm*10m/20m/33m



(Log size)

130u/150u* 19mm x 10m / 20m / 33m(Roll size)

Option: UL, BS EN 60454-3-1, RoHs Certificated

Application: Applying to electric wire, cable winding, transformer, power distribution equipment, automobile circuit, electrical engineering, household electrical, motor, capacitor

Color:

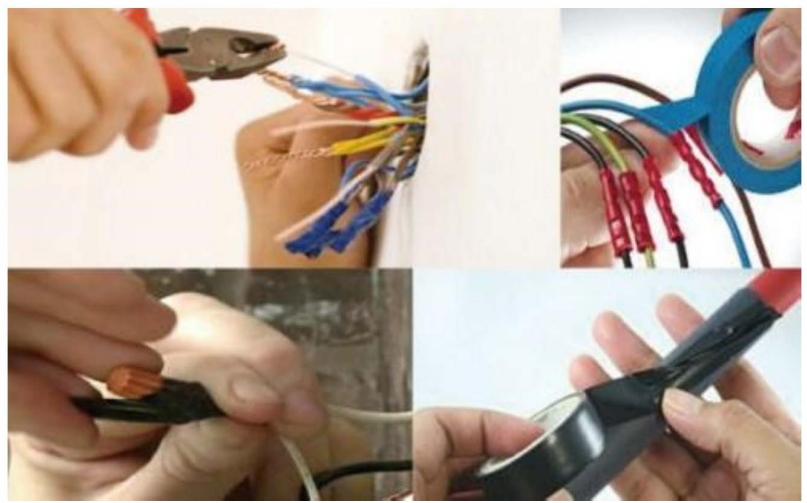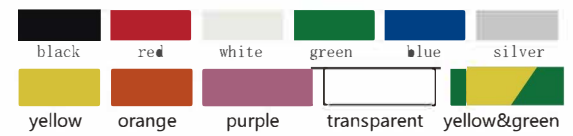

PVC Anti Slip Tape

Code : 401120

Adhesive: Pressure sensitive adhesive

Size: 70u/80u*1250mm*10m(Log size)



70u/80u*50mm*5m(10m)or customized

RoHs Certificated

Application: Used for sticking on the bathroom, stairs, walking areas, ships, irregular concave and convex surfaces, construction vehicles etc.

It plays a role of anti slip and can avoid fall accidents.

Color:

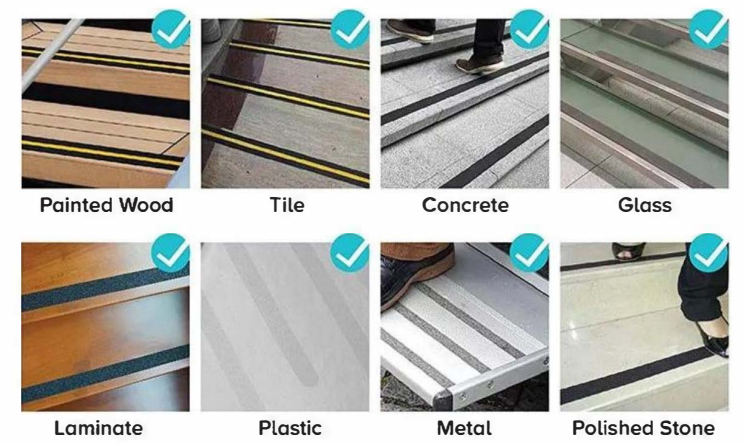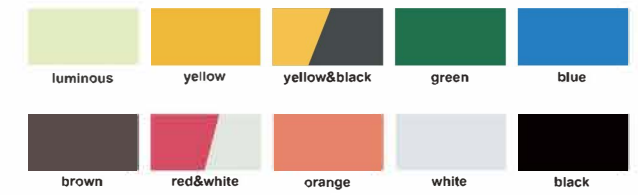

PVC Tape

PVC Pipe Wrapping Tape

Code: 401130

Adhesive: Natural rubber

Size: 150u/180u*1250mm*30m(Log size)
150u/180u*48mm/50mm*30m or
customized

RoHs Certificated

Application:

Seal duct joints in heating and air conditioning systems
Prevents air leakage and stops dirt, dust and fumes from entering
system Adheres to metals, most plastics or glass fibre materials



PVC Floor Marking Tape

Code : 401140


Adhesive: Natural rubber

Size: 150u/180u*1250mm*30m(Log size)
150u/180u*50mm/75mm*30m or customized

RoHs Certificated

Application:

Used on plant and warehouse floors to highlight
physical hazards, to warn people of dangerous
areas and to delimit areas according to their functions

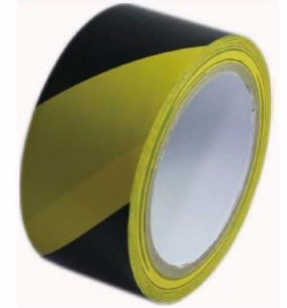

Color:



silver

black

white

Single Color:



red

white

blue

yellow

green

orange


Double Color:



green&white

red&white

black&yellow



Wire Harness Wrapping Tape

Non- FR Fleece Wireharness Tape

Code: 501110(similar to Tesa 51608)

Adhesive : hotmelt

Temperature resistance: 105 °C.

Hand-tearable fleece cloth single coated with a high tack adhesive, widely used for wire harness.

Application: Widely used for the wire harness in automotive industry Protecting critical electrical wires and cables from harm or damage.

Easy to tear by hand, waterproof and anti-aging.



FR Polyester Cloth Wire Harness Tape

Code: 501120(Similar to Tesa 51036)

Adhesive: hotmelt

Temperature resistance(long time):

-40 °C to 105 °C(0.18mm thickness),

-40 °C to 125°C(0.25mm thickness)

Standard size: 0.18mm/0.25mm* 19mm*25m or customized Cloth automotive wire harness tape is using cotton cloth as backing material and coated with pressure sensitive adhesive.

Feature: Strong adhesion, strong pollution resistance on the surface, anti aging, anti corrosion.

Application: Used for wrapping automotive wire harness with high temperature resistance, position of need to reduce noise and wear resistance of auto.



Wire Harness Wrapping Tape

FR PVC Wire Harness Wrapping Tape

Code: 501130


Adhesive :Natural rubber, both shiny and matte surface

Size:80u/100u/130u/150u* 1250mm*10m/20m/33m
(Log size) 130u/150u* 19mm x 10m / 20m /
33m(Roll size)

UL, BS EN 60454-3-1, RoHs

Certificated

Application: Professional electrical insulation, Automobile wire harness and jacket.

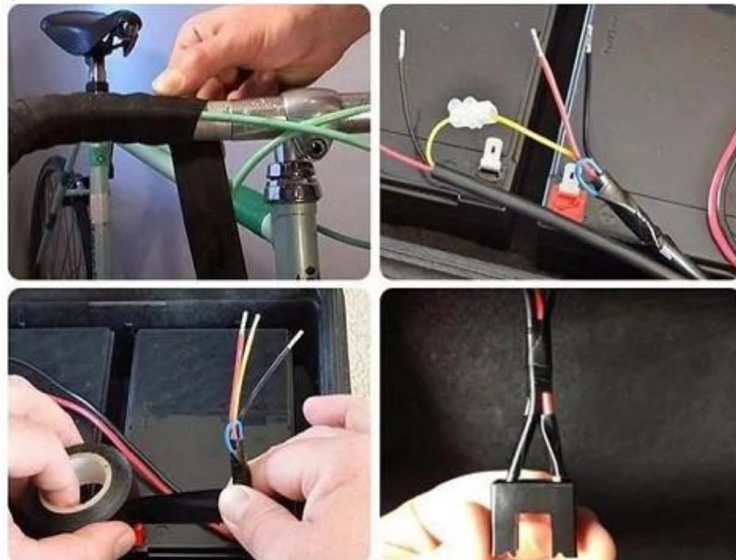

Halogen-free PE film Wire Harness Tape

Code: 501140 (Similar to Tesa 62309)

Material: Halogen-free PE film with an acrylic adhesive.

Designed for the passenger compartment for standard wrapping up to a temperature class of 125°C for 3000 hours.



Construction Seaming Tape

PE Stucco Masking Tape

Code: 991151

Use to mask Windows and doors during masonry job

Strong adhesion ideal for stucco

Weather and UV resistant polyethylene tape



PE Tuck Sheathing Tape

Epoxy Resin Tape

Code: 991150

Feature:

Excellent resistance to UV & Weathering

Prevents air infiltration

Provides permanent bonding.

Application: Seaming, splicing, sealing, and repairing materials used for moisture barriers, both inside and out.

It helps to maximize energy efficiency by sealing the gaps, cracks, and crevices where air can easily enter the home and ultimately affect your heating and cooling costs.



Construction Seaming Tape

PVC Orange Plastering Tape

Code: 991152 (Same as Scapa 6993)

PVC plastering tape for protecting and masking during painting, plastering and varnishing tasks on smooth surfaces such as plastic, wood (primed, painted) and aluminium in interior and exterior areas

We have both smooth surface and embossing surface at Economic Grade and REACH grade.

Application: For easy stripping and insulation.it's widly used in Construction and high power site needing strong adhesive.



Butyl Rubber Tape (Waterproof Leakage Tape)

Self-Fusing Rubber Tape

Code:990001

Carrier:Rubber Glue:Butyl

Thickness: 0.4-2mm Width:5-800mm

Length:≤20M

EPR Based can be option

Application:

Self-fusing rubber tape is Used on automotive, plumbing,hose, electrical;boats, marine application, aquariums, liquid containers, extreme temperature and pressure applications; sealing and patching application.







Waterproof Rubber Mastic Tape

Code:990002

Size:2in*0.065in*10ft/51mm*1.65mm*3m



Property	Value
Tensile Strength	1.16MPa
Ultimate Elongation	900%
Viscosity(steel plate)	55N/50mm
Viscosity(PE)	55N/50mm
Melting point	A grade pass
Dielectric loss	0.008
Working Temperature	90°C
Emergency overload	130°C
Water absorption	0.49%
Water vapor percolation rate	<0.26g/(100inch 2.24h)
Ozone resistance test	pass
Heat exposure	130°C
UV resistance	pass

Using Steps		Model	Adhesion (mm)	Tensile Strength (Mpa)	Elongation (%)	Disruptive Voltage (KV/mm)
		J10	≥2N/mm	≥1.5	500	1-6KV
		J10-1	≥2N/mm	≥1.5	500	>6KV
		J20	≥2N/mm	≥1.5	500	6-10KV
		J20-1	≥2N/mm	≥1.5	600	>10KV
		J30	≥2N/mm	≥1.5	600	10-35KV
		J30-1	≥2N/mm	≥1.5	600	>35KV
		J50	≥2N/mm	≥1.5	600	35-50KV
		J50-1	≥2N/mm	≥1.5	600	>50KV
						



Butyl Rubber Tape (Waterproof Leakage Tape)

Butyl Windsreen Sealant

Code: 990003

Color: Black/Grey

Size: φ3mm*4M/4.5M/5M, φ5mm*10M,
 φ6mm*8M
 φ10 MM *4M/4.5M/5M, φ8mm*4M

Instruction:

This tape is specially developed for car lights, it is mainly made by butyl rubber with a variety of other environmental

AIDS.The environmental friendly solvent - free sealant is produced by special process.It is the most advanced automotive light insulation shock absorption, waterproof. It can withstand a certain degree of displacement and deformation, and has good tracking.

Application:

Widely used for car door, window screen and headlight installation.

Feature:

Good stretching, shrinking and sealing performance
 Strong viscosity, waterproof, no smell,aging resistance, weather resistance, UV resistance, sticky and soundproof.



Double Sided Rubber Butyl Tape


Code: 990004

Thickness : 0.5 to 20mm

Width Range: 4 to 550mm


Length: 600mm to 40M

Colour: grey ,black,white



Technical data of double-sided butyl tape

ITEM:YC-6011	CONDITION	double-sided butyl tape	STANDARD	
BASIC COMPOSITION		MONO ELEMENT BUTYL-LATEX		
HEAT RESISTANCE	90±2°C. 2h	NO FLOWING AND NO CRACKLING	ASTM C792-93	
LOW TEMPERATURE FLEXIBILITY	-40°C. 72h	NO-CRACKLE ON SURFACE	ASTM C734-01	
ELONGATION	23°C 250mm/min	600%	ASTM C736-00	
CLARITY HUMIDITY	23°C.24h	0.3g/m²24h	GB/T 12952-91	
TENSILE STRENGTH	23°C 50mm/min	125Kpa	ASTM C719-93	
PEELING FORCE	23°C 300mm/min	12N/cm	ASTM D3330-02	
N/cm SHEARING FORCE	STEEL SLAB	23°C 250 mm/min	GB/T 12952-91	
	GLASS			
	CEMENT SLAB			
	STAINLESS PLATE			
High Pressure water Resistance		Excellent		
Moisture Resistance		Excellent		
Thermal shock Resistance		Excellent		
CORROSION	ZINC-PLATE AL-CASE	3/4 IMMERSE IN DISTILLED WATER. 168h	NO SCAR. NO CORROSION	ASTM D925
	CU-CASE	70±2°C. 168 h	NO CHANGE IN BLACK. NO ETCHING	

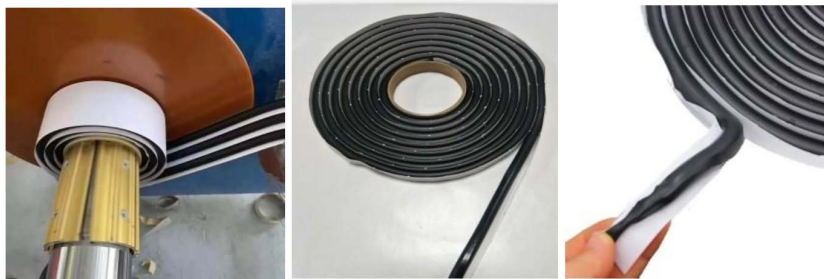

Butyl Rubber Tape (Waterproof Leakage Tape)

Aluminum foil Butyl Rubber Tape

Code: 990005

aluminum foil waterproof butyl tape is made of butyl rubber, PIB as basic material. Polyethylene film, aluminium foil as surface finished material. It has strong adhesion to various material surfaces, and has excellent weather resistance, aging resistance and water resistance, sealing, shock absorption and protection on the surface of the adhered.



Single Sided Non-Woven Butyl Tape

Code: 990006

Thickness: 0.6 to 10mm

Width Range: 20 to 550mm

Length: 600mm to 40M

Colour: grey ,black,white



PRODUCT APPLICATION



• Splicing of tunnel waterproof board.



• The overlap between the light steel roof color steel plate and the daylighting board and the sealing of the joint of the gutter.



• Steel plate warehouses are sealed and waterproof, doors and windows, concrete roofs, and ventilation ducts are sealed and waterproof.



• Installation of PC board and endurance board.



• Sealing of containers.

Butyl Rubber Tape (Waterproof Leakage Tape)

Caulk Strip

Code: 990007

A: PE +Butyl Adhesive

B:PVC + Acrylic glue /Tissue

Size:

12.8 mmx3.35m

22 mmx3.35m

38 mmx3.35m

41 mmx3.35m

60 mmx3.35m

80mmx3.35m

Customized as you need



Application



Double Sided Tape

Double Sided Nano Tape

Code: 990008

Material: Acrylic

Thickness: 0.5mm/1mm/1.5mm/2mm

Width: 2cm/3cm/5cm **Length:**1m/2m/3m/5m

Color: Transparent/red/blue


Feature

Removable& Reusable&Traceless

No sticky residue

Multipurpose-indoor&outdoor,Home use/Car use/For office/Advertising paste

Supplied to FBA warehouse experience



Double Sided Polyester Tape

Code: 990009


Thickness:

30u,50u,80u,100u,125u,160u,205u.

Temperature Resistance: -20°C to 130°C

Description

Double Sided Polyester Tape is the PET(polyester) film as carrier with acrylic adhesive evenly coated on both sides and then lined with red released film.



Feature

- Anti-static Clean
- remove
- Strong tensile strength
- Stable and reliable

Application



Automotive ABS plastic parts
Used in the automotive industry to secure automotive ABS plastic parts or other decorative parts.



Furniture decorative parts
Widely used in the furniture industry, it can assemble decorative parts.



Electronic components
Used to bond cell phone battery compartments, lenses and other electronic components.

Double Sided Tape

Double Sided Tissue Tape

Code:990010
Adhesive:Acrylic
Size:1020mmx1000m(Jumbo size)
 50mmx25m/50m or customized(Roll Size)



Product	Double Sided Tissue Tape general usages	Double Sided Tissue Tape high temperature	Black Double Sided Tissue Tape general usages	Black Double Sided Tissue Tape high temperature
Data				
Backing	Tissue			
Adhesive	Hot melt adhesive / water acrylic / solvent acrylic adhesive	Solvent acrylic adhesive		
Adhesive color	Transparent / yellow / black			
Liner	White / brown / light yellow / yellow glassine paper, etc			
Application	General purpose, for leather, shoes positioning, for computer embroidery, garment positioning, for sealing plastic, paper bags, for sticking wall paper & other paper crafts . for nameplates, die cutting, paper splicing, for foam lamination,for plastic objects&film switches mounting,for objects sticking in TV and etc.			

Practical use



Professional use of computer embroidery

Fixed seams for clothing and shoes

Used in the electronics industry

Double Sided Sandblasting Masking Protection Tape

Code: 990010
Adhesive:Hotmelt
Size:25mm*12m or customized
Temperature resistance: -20°C - 80°C
 Taking durable silicone rubber backing and strong acrylic adhesive, can meet requirements of heavy duty blasting impact protection and shot peen masking



Key characteristics & applications

- Acrylic adhesive with 8N/2.5CM peel adhesion, excellent tack
- Suitable for use on irregular surfaces,no edge warping
- High strength, puncture proof and its resistance of breakdown capacity can be 58.8/CM2, without residue
- Applied for metal pre-treatment such as shot peen and sandblasting protection in Aviation, Power station and Oil and gas drilling fields.



Foam Tape

Double Sided PE Foam Tape

Code: 601110
Backing: PE foam
Adhesive: Hot melt / solvent acrylic
PE Foam Density (kg/m³): 32/48/64/96/192/240kg/m³
Liner Color:
 Paper liner



Film liner



Application: cushioning, shockproof and sealing; For pipeline wrapping for air conditions, auto trim attachment, door sealing strips, etc.



Double Sided EVA Foam Tape

Code: 601120
Backing: EVA foam
Adhesive: Hot melt / solvent acrylic
Liner Color:

Paper liner



Film liner



Application: For holding hooks, racks and photo frame; For die cut, cushioning, shockproof and sealing; For pipeline wrapping for air conditions, auto trim attachment, door sealing strips, etc.



Foam Tape

EPDM Foam Tape

Code:601130

Backing: EPDM foam

Adhesive: Hot melt / solvent acrylic

Color:

Paper liner




White yellow glassine

Film liner



red green blue

Foam Color



black white grey



Single Sided Foam Tape



Product	Single sided PE foam tape (with liner) 601111	Single sided PE foam tape (without liner) 601112	Single sided EVA foam tape (with liner) 601121	Single sided EVA foam tape (without liner) 601122
Backing	PE Foam		EVA Foam	
Adhesive	Hot melt adhesive / solvent acrylic			
Foam density	30/64/96kg/m etc		38/4/55shore, etc	
Thickness	1/2/3/5/6mm, etc			
Liner	Paper liner / plastic film liner	-	Paper liner / plastic film liner	-
Application	For cushioning, shockproof and sealing, pipeline wrapping for air conditions and holding hooks, etc			

Application: For sealant and die cutting; for die cut, cushioning, shockproof and sealing; for pipeline wrapping, for air conditions, auto trim attachment, door sealing




Safety & Warning Tape

Reflective Tape

Code: 701110

Material: PET, PVC, PC, PMMA

Size: PET, PVC, PC, PMMA

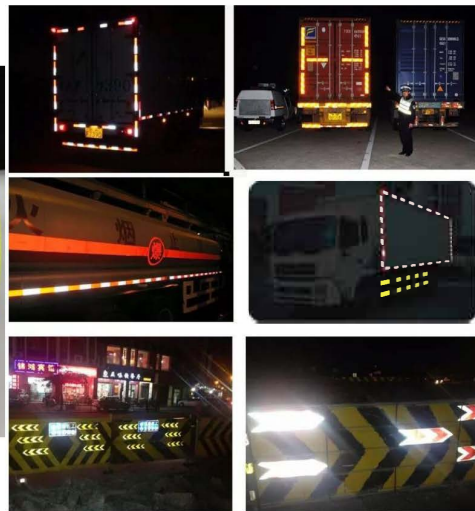

Cloth Warning Tape

Code :701120

Adhesive : Natural rubber/Hotmelt
1020mmx500m (Jumbo size)
50mmx25m or customized (Roll size)

Application:
Exhibition and area identification/
Area division/Special area warning



Applications



Factory workshop



Parking lot



Security area



Warehouse planning

Safety & Warning Tape

PVC Warning Tape

Cod: 701130

Thickness: 0.13mm ,0.15mm

Size: Customized



MULTI-SCENARIO OPERATION



Epoxy floor division



Wood ground division



Channel railing warning



Tile floor division




Garage export planning

Luminous Glow Tape

Code: 701140

Natural glow in the dark, no need of power energy, energy conservation, environmental protection, bright warning labels can also beautify the environment effect. Also has the waterproof, sunscreen, strong corrosion, self-adhesive, etc; And avirulent insipidity, no radioactive elements; Construction is convenient and simple.

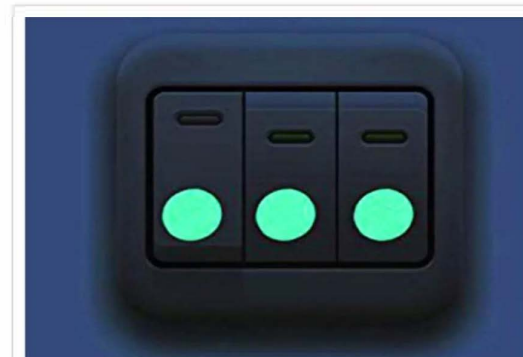

Safety & Warning Tape

PE Warning Tape

Code: 701150

PE warning film is mainly used for marking dangerous areas and special instructions, such as traffic, painting, construction working site, the fields of law enforcement, investigation zones and utilities.



Carpet Antislip Tape

Code : 801130

Adhesive: Acrylic solvent adhesive

Size: 0.28mm*48mm*10m

Surface Texture:

The surface texture of the tape has a deep texture, which has a strong anti-skid effect on the ground, waterproof and wear-resistant.

Sticky Surface:

Use PVE or PET or aluminum base material, plus glue and release paper to form a sticky surface, durable and anti-aging.

Usage: Fix carpet to prevent falling due to carpet movement.



Cat Training Tape

Code: 801120

NON-TOXIC AND 100% PET SAFE

Using the best glue adhesive in the world, Cat Scratch Tape adhesive has no taste of impurities, it passed the quality certification to ensure it is healthy and family safe. This cat scratch deterrent is non-toxic, hypo-allergenic and will not put your pets in any harm. It is non-toxic and safe for your pets.



SUIT FOR ALL COUCH



Acrylic



Cotton



Fabric



Leather



Linen



Microfibre



Polyester



Silk



Wool

Crepe Paper Masking Tape



Code: 801140

Adhesive : Rubber

Size:990mm*1500m or
 1250mm*1500m(Jumbo size)

48mmx25m/30m or customized(Roll Size)

Temperature Resistance

60°C 80°C,120°C, 150°C with or without UV
 Other color just for usual masking at usual
 circumstance. **Advantage:**High temperature
 resistance,anti-chemical solvent,Tear without
 residual glue

Usage: Widely used in interior decoration,
 household appliances painting,Car painting,
 upholstery, masking art writing.



Wall



Car



Furniture



Packaging



Painting



Jointing

Washi Tape



Code : 801150

Adhesive: Hotmelt

Size:15mm*10m or
 customized

Features:

100%Brand new and high quality.

Enjoy Creative Crafts: Grid Craft Tapes For

Decorating Masks, Creating Personalized Greeting Cards.

Decorate your Cellphone or Making Mini Flags For Cupcakes
 Etc.

An Ideal Gift For Kids.DIY Washi Tape: Great Decorative Washi T

ape For Arts And Crafts, Gift Wrapping, Scrapbooking, Photo
 Album, Journal, Planners, Cards, Frames, Walls, Holiday Party
 Supplies Etc. 14 different colors : light blue, dark blue, white,
 black, khaki, brown,

green, blue, gray, green white, rice white, orange, pink and purple
 red; Self sticky tapes roll.

Application: Decorative masking tape for all purposes like
 planners, art project, DIY scrapbooking craft tapes, and best for
 gift wrapping.



PROCUREMENT SERVICES FROM

BDFS

BuyDirectFromSuppliers.com

Manufactured in Mexico-China-Brazil-USA-Bahrain

Brent Gilbertson
Managing Partner/Founder

Mobile: 678-361-5559
Brent@BuyDirectFromSuppliers.com

INDUSTRY TAPES & SPORTS TAPES

20 years of export experience, exported to 92 countries

